





F/G. 2

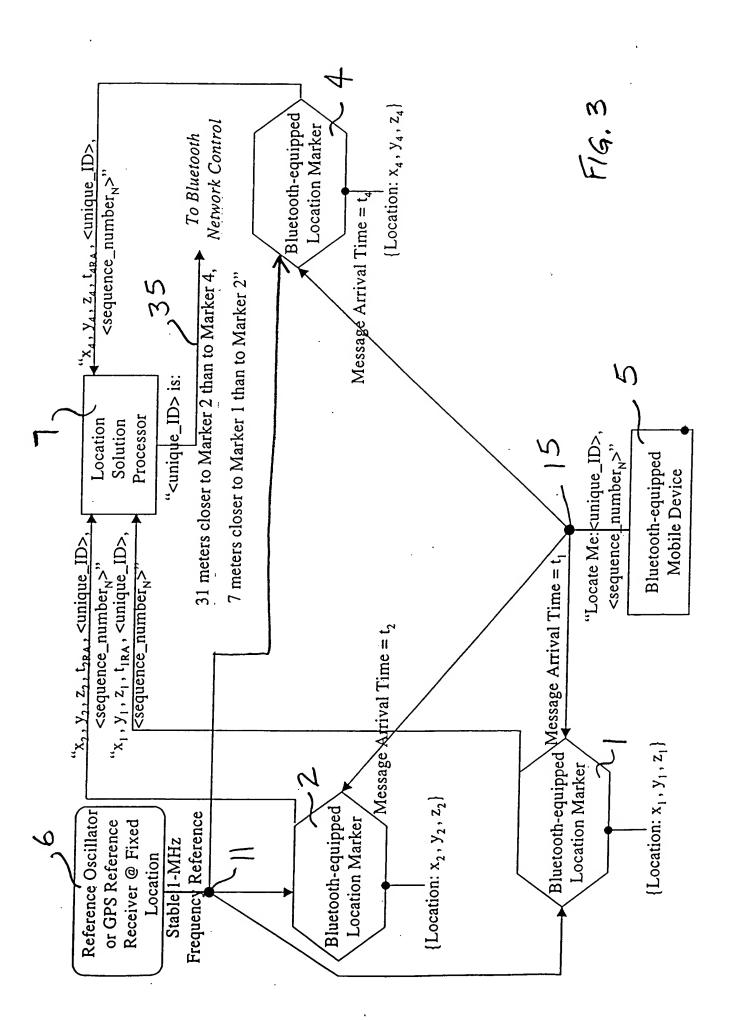

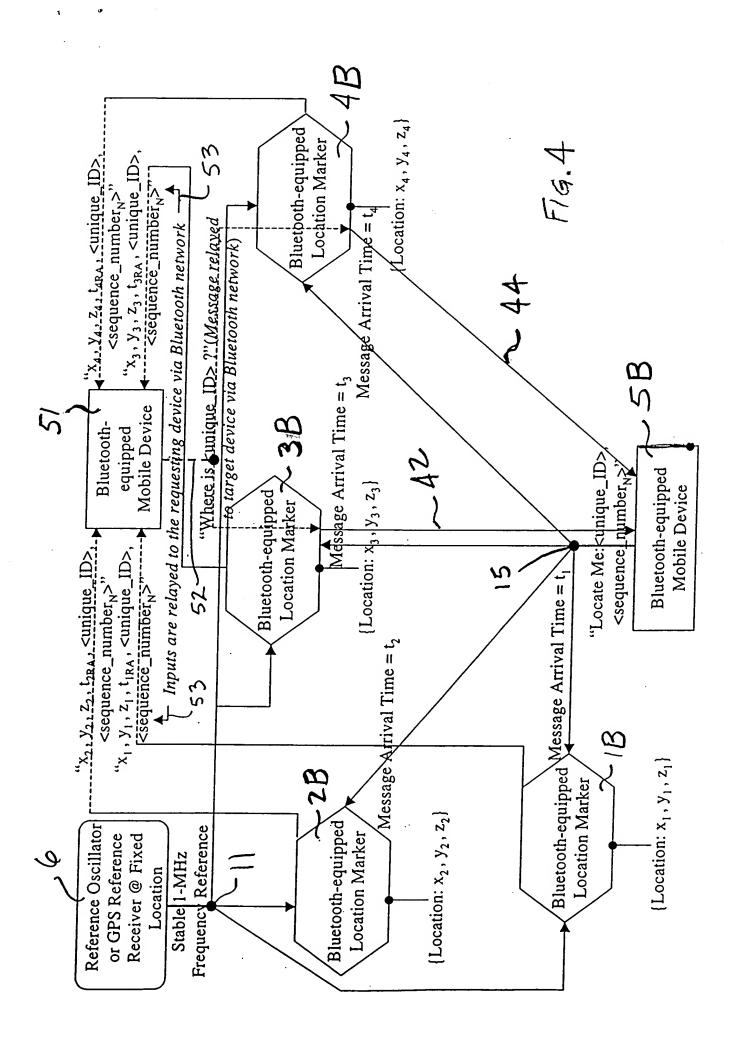

transmit "Locate Me" message 56 use a single timing reference to determine message arrival times at prown locations estimate location based on arrival time differences

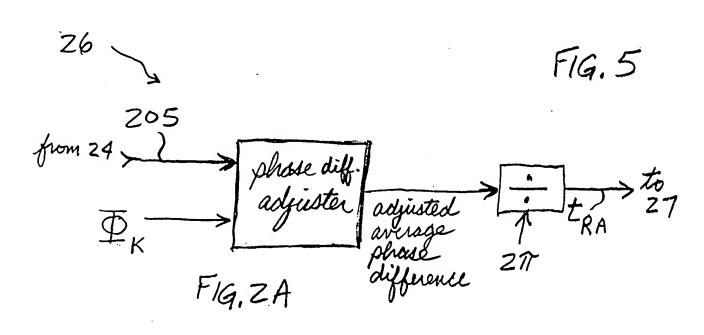

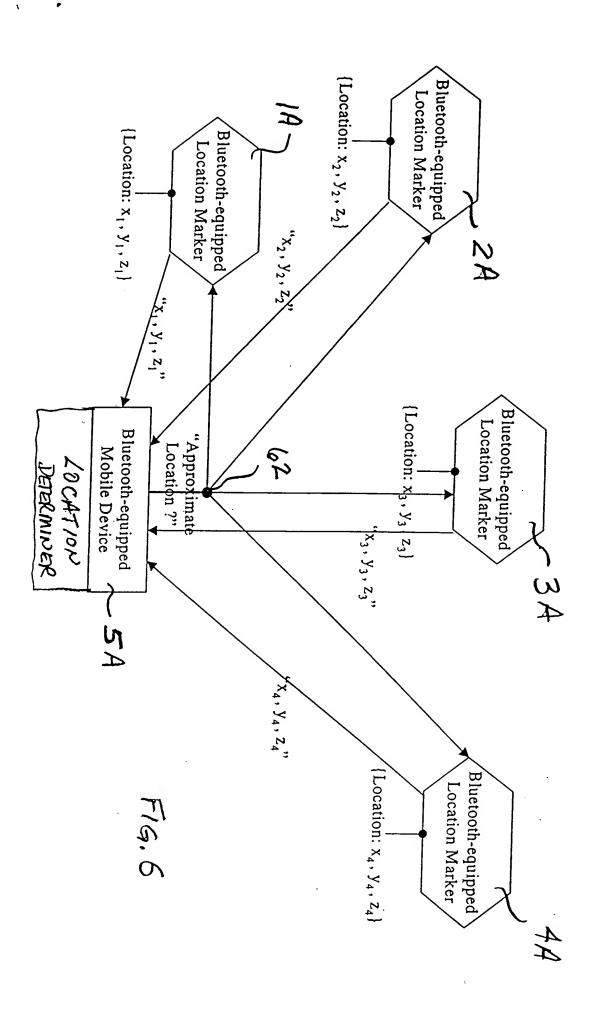

transmit "approximate Location" message at predetermined ower level receive response (s) from known location (s) estimate location based on power level and location (s) that responded

FIG. 7